



NARCO AVIONICS CP 135 and CP 136

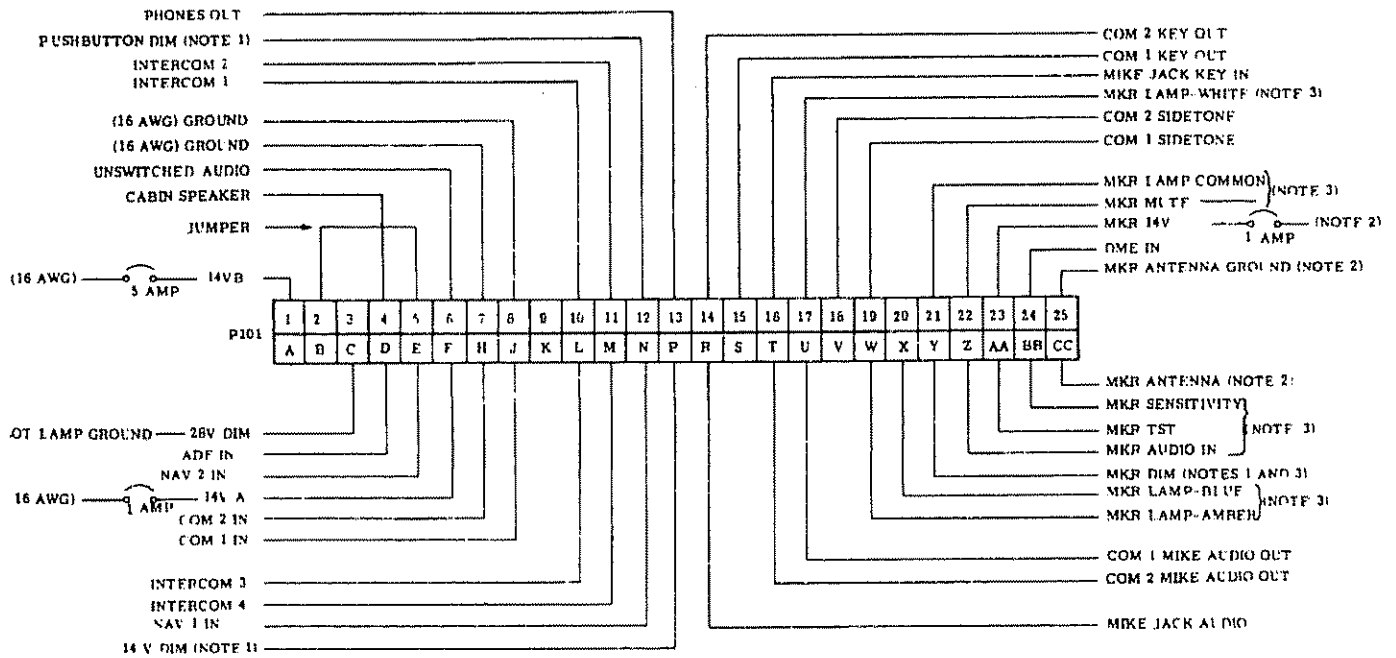

- NOTES
- 1 REFER TO PARAGRAPH 2.5.3 FOR VARIOUS DIMMER CONNECTION METHODS
 - 2 CONNECTION REQUIRED ONLY WHEN OPTIONAL INTERNAL MARKER BEACON RECEIVER IS INSTALLED
 - 3 CONNECTION NOT REQUIRED WHEN OPTIONAL INTERNAL MARKER BEACON RECEIVER IS INSTALLED
- (ALL SIGNAL LEADS 22 AWG UNLESS OTHERWISE NOTED)

FIGURE 2-9. CP 136 14V GENERAL WIRING DIAGRAM

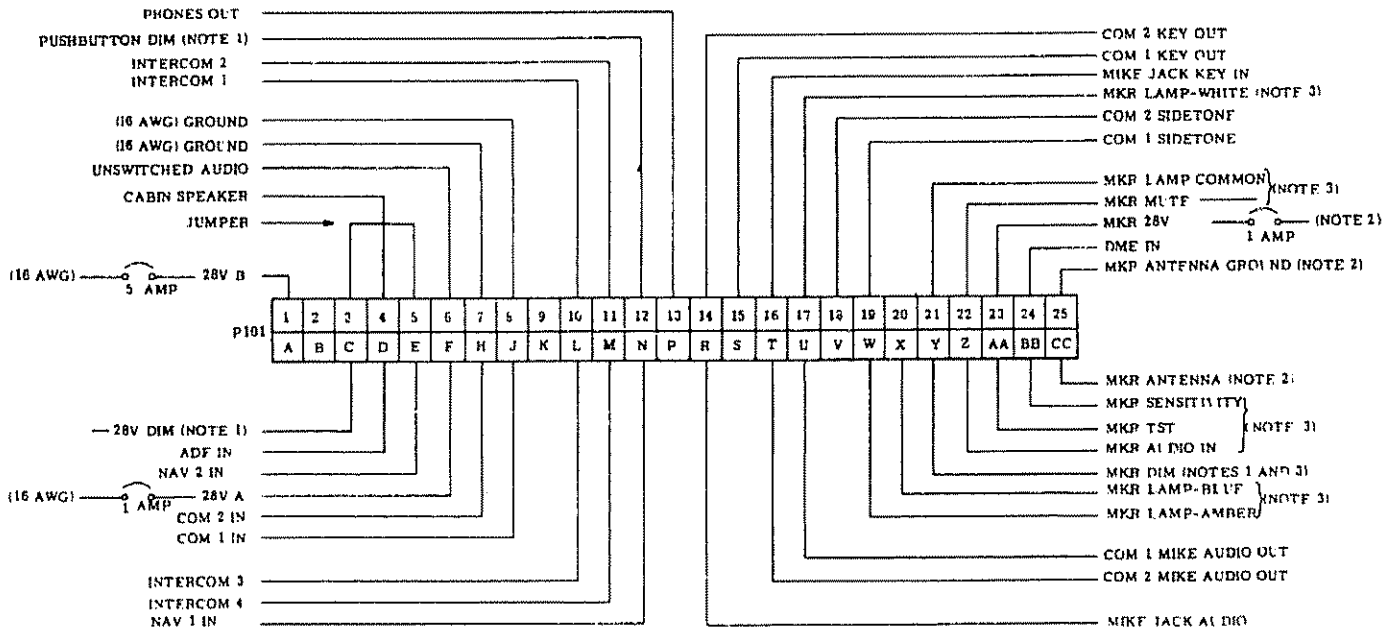

- NOTES
- 1 REFER TO PARAGRAPH 2.5.3 FOR VARIOUS DIMMER CONNECTION METHODS
 - 2 CONNECTION REQUIRED ONLY WHEN OPTIONAL INTERNAL MARKER BEACON RECEIVER IS INSTALLED
 - 3 CONNECTION NOT REQUIRED WHEN OPTIONAL INTERNAL MARKER BEACON RECEIVER IS INSTALLED
- (ALL SIGNALS LEADS 22 AWG UNLESS OTHERWISE NOTED)

FIGURE 2-10. CP 136 28V GENERAL WIRING DIAGRAM